



2025 STREET



Ride free



 HONDA

Contents

CB1000 Hornet SP	new	03
CB1000 Hornet	new	04
CB750 Hornet	new	05
CB500 Hornet		06
CB650R		07
CMX1100T Rebel	new	08
CMX1100SE Rebel	new	09
CMX1100 Rebel	new	10
CMX500 Rebel	updated	11
CL500	updated	12
GB350S	new	13
CB125R		14
CB125F		15
MSX125 Grom	new	16
Monkey 125		17
Dax 125		18
Specifications		19

HORNET 1000 SP

- Brembo systema brake caliper
- Ohlins monoshock damper
- Stunning inline four-cylinder engine
- Piercing LED lighting
- Premium full colour 5-inch TFT screen
- 5 riding modes with Honda Selectable Torque Control (HSTC)
- Streetfighter handling agility



Stings harder than ever

Engine

Engine Type	Liquid-cooled DOHC 4-stroke 16-valve 4-cylinder
Engine Displacement	1,000 cc
Max. Power Output	115.6 kW @ 11,000 rpm
Max. Torque	107 Nm @ 9,000 rpm
Fuel Consumption	5.9 L/100km
CO ₂ Emissions	136 g/km

Chassis, Dimensions and Weight

Length x Width x Height	2,140 x 790 x 1,085 mm
Seat Height	809 mm
Wheelbase	1,455 mm
Kerb Weight	212 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Radial mounted four-piston Brembo Stylema brake caliper, 310 mm floating double disc / Nissin Single piston caliper, 240 mm single disc
Tyres (Front/Rear)	120/70ZR17M/C (58W) / 180/55ZR17M/C (73W)
Suspension Front	41 mm Showa USD SFF-BP Fork 118 mm travel
Suspension Rear	Ohlins Monoshock damper, Prolink swingarm, 139 mm travel

HORNET 1000

- Stunning inline four-cylinder engine
- Piercing LED lighting
- Premium full colour 5-inch TFT screen
- 5 riding modes with Honda Selectable Torque Control (HSTC)
- Streetfighter handling agility
- Radial mounted four-piston brake caliper



Engine

Engine Type	Liquid-cooled DOHC 4-stroke 16-valve 4-cylinder
Engine Displacement	1,000 cc
Max. Power Output	111.6 kW @ 11,000 rpm
Max. Torque	104 Nm @ 9,000 rpm
Fuel Consumption	5.9 L/100km
CO ₂ Emissions	136 g/km

Chassis, Dimensions and Weight

Length x Width x Height	2,140 x 790 x 1,085 mm
Seat Height	809 mm
Wheelbase	1,455 mm
Kerb Weight	211 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Radial mounted four-piston Nissin brake caliper, 310 mm floating double disc / Nissin Single piston caliper, 240 mm single disc
Tyres (Front/Rear)	120/70ZR17M/C (58W) / 180/55ZR17M/C (73W)
Suspension Front	41 mm Showa USD SFF-BP Fork 118 mm travel
Suspension Rear	Showa Monoshock damper, Prolink swingarm, 138 mm travel



- Advanced technology for riding perfection
- New colour 5-inch TFT Display loops you in
- Power and torque for high performance
- Enhanced style and functionality
- Lightweight chassis
- Distinct sound
- 35kW A2 licence option available



Shake up the hive

Engine

Engine Type	Liquid-cooled SOHC 4-stroke 8-valve Parallel Twin with 270° crank
Engine Displacement	755 cc
Max. Power Output	67.5 kW @ 9,500 rpm (A2: 34.5 kW @ 5,250 rpm)
Max. Torque	75 Nm @ 7,250 rpm (A2: 66 Nm @ 4,750 rpm)
Fuel Consumption	4.3 L/100 km (A2: 4.1 L/100km)
CO ₂ Emissions	99 g/km (A2: 95 g/km)

Chassis, Dimensions and Weight

Length x Width x Height	2,090 x 780 x 1,085 mm
Seat Height	795 mm
Wheelbase	1,420 mm
Kerb Weight	192 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Radial mounted four-piston Nissin brake caliper, 296 mm floating double disc / Single piston caliper, 240 mm single disc
Tyres (Front/Rear)	120/70ZR17M/C (58W) / 160/60ZR17M/C (69W)
Suspension Front	Showa 41 mm SFF-BP USD, 130 mm travel
Suspension Rear	Monoshock damper, Prolink swingarm, 150 mm travel

HORNET 500

- Honda Selectable Torque Control (HSTC)
- Class-leading suspension and brakes
- Honda roadsync smartphone connectivity
- Razor sharp new styling
- New full colour 5-inch TFT screen
- A2-compliant twin cylinder engine



Join the hive

Engine

Engine Type	Liquid-cooled 4-stroke DOHC parallel twin
Engine Displacement	471 cc
Max. Power Output	35 kW @ 8,600 rpm
Max. Torque	43 Nm @ 6,500 rpm
Fuel Consumption	3.5L/100km
CO ₂ Emissions	80 g/km

Chassis, Dimensions and Weight

Length x Width x Height	2,080 x 800 x 1,060 mm
Seat Height	785 mm
Wheelbase	1,410 mm
Kerb Weight	188 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Dual 296mm x 4mm disc with Nissin axial mounted 4-piston calipers / Single 240mm x 5mm disc with single piston caliper
Tyres (Front/Rear)	120/70ZR17M/C / 160/60ZR17M/C
Suspension Front	Showa® 41mm SFF-BP USD forks
Suspension Rear	Prolink mono with 5 stage preload adjuster, steel hollow cross swingarm



- New full colour 5-Inch TFT screen
- Agile new style
- Inline four-cylinder engine
- Honda Selectable Torque Control (HSTC)
- High quality suspension and brakes
- E-Clutch
- Neo Sports Café



Minimalist perfection

Engine

Engine Type	Liquid-cooled 4-stroke 16-valve DOHC inline-4
Engine Displacement	649 cc
Max. Power Output	70 kW @ 12,000 rpm / 35 kW @ 10,500 rpm (A2)
Max. Torque	63 Nm @ 9,500 rpm / 49 Nm @ 4,500 rpm (A2)
Fuel Consumption	4.9 L/100km
CO ₂ Emissions	113g/km

Chassis, Dimensions and Weight

Length x Width x Height	2,120 x 780 x 1,075 mm
Seat Height	810 mm
Wheelbase	1,450 mm
Kerb Weight	205 kg (MT) / 207 kg (E-Clutch)

Wheels, Suspension and Brakes

Brakes (Front/Rear)	310 mm double disc with four piston caliper / 240 mm single disc with single piston caliper (2 channel ABS System Type)
Tyres (Front/Rear)	120/70 ZR17 / 180/55 ZR17
Suspension Front	41 mm SFF-BP USD forks
Suspension Rear	Monoshock damper with 10 stage adjustable preload

REBEL 1100

CMX1100T

- Rigid saddlebags
- Large mounted front fairing and screen
- Unique styling and colour
- New 5-inch TFT screen
- Updated Dual Clutch Transmission (DCT)
- Distinctive LED lighting
- High quality suspension
- Torquey 1,084cc parallel twin-cylinder engine



Image shown on the page contain models of non-European specification and a colour option which is not sold in Europe.

There's a rebel in all of us

Engine

Engine Type	Liquid cooled 4-stroke 8-valve parallel twin with 270° crank and uni cam
Engine Displacement	1,084 cc
Max. Power Output	65 kW at 7,250 rpm
Max. Torque	98 Nm @ 4,750 rpm
Fuel Consumption	4.9 L/100 km (MT) / 5.3 L/100 km (DCT)
CO ₂ Emissions	114 g/km (MT) / 123 g/km (DCT)

Chassis, Dimensions and Weight

Length x Width x Height	2,240 x 850 x 1,180mm (MT) 2,240 x 845 x 1,180mm (DCT)
Seat Height	710 mm
Wheelbase	1,520 mm
Kerb Weight	240 kg (MT) / 250 kg (DCT)

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Radial mounted monoblock four-piston brake caliper, 330mm floating single disc / two single piston caliper, 256mm single disc
Tyres (Front/Rear)	130/70B18 M/C 63H / 180/65B16 M/C 81H
Suspension Front	Preload adjustable 43mm cartridge style
Suspension Rear	Preload adjustable twin piggyback rear shock

REBEL 1100

CMX1100SE

- Chrome bar end mirrors
- Diamond-stitch seat
- Individual styling
- New 5-inch TFT screen
- Updated Dual Clutch Transmission (DCT)
- Distinctive LED lighting
- High quality suspension
- Torquey 1,084cc parallel twin-cylinder engine



Engine

Engine Type	Liquid cooled 4-stroke 8-valve parallel twin with 270° crank and uni cam
Engine Displacement	1,084 cc
Max. Power Output	65 kW at 7,250 rpm
Max. Torque	98 Nm @ 4,750 rpm
Fuel Consumption	5.3 L/100km
CO ₂ Emissions	123 g/km

Chassis, Dimensions and Weight

Length x Width x Height	2,240 x 880 x 1,125 mm
Seat Height	710 mm
Wheelbase	1,520 mm
Kerb Weight	237 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Radial mounted monoblock four-piston brake caliper, 330mm floating single disc / Two single piston caliper, 256mm single disc
Tyres (Front/Rear)	130/70B18 M/C 63H / 180/65B16 M/C 81H
Suspension Front	Preload adjustable 43mm cartridge style
Suspension Rear	Preload adjustable twin piggyback rear shock

REBEL 1100

CMX1100

- New 5-inch TFT screen
- Updated Dual Clutch Transmission (DCT)
- Distinctive LED lighting
- High quality suspension
- Torquey 1,084cc parallel twin-cylinder engine



Engine

Engine Type	Liquid cooled 4-stroke 8-valve parallel twin with 270° crank and uni cam
Engine Displacement	1,084 cc
Max. Power Output	65 kW at 7,250 rpm
Max. Torque	98 Nm @ 4,750 rpm
Fuel Consumption	4.9 L/100 km (MT) / 5.3 L/100 km (DCT)
CO ₂ Emissions	114 g/km (MT) / 123 g/km (DCT)

Chassis, Dimensions and Weight

Length x Width x Height	2,240 x 850 x 1,125 mm (MT) 2,240 x 835 x 1,125 mm (DCT)
Seat Height	710 mm
Wheelbase	1,520 mm
Kerb Weight	226 kg (MT) 236 kg (DCT)

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Radial mounted monoblock four-piston brake caliper, 330mm floating single disc / Two single piston caliper, 256mm single disc
Tyres (Front/Rear)	130/70B18 M/C 63H / 180/65B16 M/C 81H
Suspension Front	Preload adjustable 43mm cartridge style
Suspension Rear	Preload adjustable twin piggyback rear shock

rebel

- Updated LCD display
- Contemporary LED lighting
- High quality suspension
- Natural riding position
- Enhanced seat comfort
- 471cc liquid-cooled parallel twin-cylinder engine



Express your individuality

Engine

Engine Type	Liquid-cooled DOHC 4-stroke 4-valve two-cylinder
Engine Displacement	471 cc
Max. Power Output	34 kw @ 8,500 rpm
Max. Torque	43.3 Nm @ 6,000 rpm
Fuel Consumption	3.6 L/100km
CO ₂ Emissions	84 g/km

Chassis, Dimensions and Weight

Length x Width x Height	2,205 x 810 x 1,090 mm
Seat Height	690 mm
Wheelbase	1,490 mm
Kerb Weight	191 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Single 296 mm disc with Nissin axial-mount two piston calipers / Single 240 mm disc with single piston caliper
Tyres (Front/Rear)	130/90-16M/C (67H) / 150/80-16M/C (71H)
Suspension Front	41 mm Telescopic forks 121 mm travel
Suspension Rear	Showa twin shock with system 95 mm travel

CL

- Stability in both on and off-road environments
- Natural riding position with flat seat
- Assist & slipper clutch control
- A2 licence compatible
- LED Lighting
- Minimal yet informative LCD display



A reflection of you

Engine

Engine Type	Liquid-cooled DOHC 4-stroke 4-valve two-cylinder
Engine Displacement	471 cc
Max. Power Output	34 kW @ 8,500 rpm
Max. Torque	43.4 Nm @ 6,000 rpm
Fuel Consumption	3.7 L /100 km
CO ₂ Emissions	86 g/km

Chassis, Dimensions and Weight

Length x Width x Height	2,175 x 830 x 1,135 mm
Seat Height	790 mm
Wheelbase	1,484 mm
Kerb Weight	191 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Single 310 mm floating disc, 2 piston calipers / Single 240 mm disc, 1 piston caliper (2 channel ABS Type)
Tyres (Front/Rear)	110/80 R19M / 150/70 R17
Suspension Front	Telescopic 41 mm Upright forks
Suspension Rear	Twin shock with 45 mm round pipe swingarm, 5-step preload adjustment



- Air-cooled ohc single-cylinder engine
- Honda Selectable Torque Control (HSTC)
- Full LED lighting
- Unique muffler design
- Assist/slipper clutch
- Stylish analogue display



A2

Ride with style, live with passion

Engine

Engine Type	Air-cooled, 4-stroke, 2 valve OHC single cylinder
Engine Displacement	348 cc
Max. Power Output	15.5 kW @ 5,500 rpm
Max. Torque	29 Nm @ 3,000 rpm
Fuel Consumption	2.5 L/100km
CO ₂ Emissions	57 g/km

Chassis, Dimensions and Weight

Length x Width x Height	2,175 x 790 x 1,100 mm
Seat Height	800 mm
Wheelbase	1,440 mm
Kerb Weight	178 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Two piston brake caliper, 310 mm single disc / Single piston caliper, 240 mm single disc
Tyres (Front/Rear)	100/90R19 M/C (57H) / 150/70R17 M/C (69H)
Suspension Front	Telescopic fork, 106 mm travel
Suspension Rear	Twin shocks, 120 mm travel



- DOHC 4v single-cylinder engine
- Six-speed gearbox
- Full LED lighting
- Negative LCD display
- 41 mm Showa SFF-BP USD



Engine

Engine Type	Liquid-cooled 4-stroke 4-valve DOHC single cylinder
Engine Displacement	124.9 cc
Max. Power Output	11 kW @ 10,000 rpm
Max. Torque	11.6 Nm @ 8,000 rpm
Fuel Consumption	2.1 L/100 km
CO ₂ Emissions	50 g/km

Chassis, Dimensions and Weight

Length x Width x Height	2,015 x 820 x 1,055 mm
Seat Height	816 mm
Wheelbase	1,345 mm
Kerb Weight	130 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	296 mm single disc with hydraulic dual piston brake caliper / 220 mm single disc with hydraulic single piston brake caliper (Front and rear independent ABS with IMU)
Tyres (Front/Rear)	110/70 R17 / 150/60 R17
Suspension Front	41 mm SFF-BP USD forks
Suspension Rear	Single damper

CB125F

- SOHC, single-cylinder enhanced Smart Power (eSP) engine with ACG
- More aggressive styling
- Tough frame and supple ride quality
- All the information you need
- Split-spoke 18-inch cast aluminium wheels
- Big-bike style & handling



Start something special

Engine

Engine Type	Air-cooled 4-stroke 2-valves OHC single cylinder
Engine Displacement	124 cc
Max. Power Output	8 kW @ 7,500 rpm
Max. Torque	10.9 Nm @ 6,000 rpm
Fuel Consumption	1.4 L/100 km
CO ₂ Emissions	34 g/km

Chassis, Dimensions and Weight

Length x Width x Height	2,015 x 750 x 1,100 mm
Seat Height	790 mm
Wheelbase	1,280 mm
Kerb Weight	117 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	240 mm single disc with 2 piston caliper / 130 mm drum (2 channel CBS)
Tyres (Front/Rear)	80/100 R18 / 90/90 R18
Suspension Front	31 mm Telescopic
Suspension Rear	



- Bright lights and LCD screen
- 5-speed air-cooled engine
- Big tyres plus braking safety
- Smooth riding suspension
- Low seat height
- Easy handling



Small bike, big attitude

Engine

Engine Type	Air-cooled 2-valve single cylinder
Engine Displacement	124 cc
Max. Power Output	7.3kW @ 7,250 rpm
Max. Torque	10.8 Nm @ 6,000 rpm
Fuel Consumption	1.5 L/100 km
CO ₂ Emissions	35.1 g/km

Chassis, Dimensions and Weight

Length x Width x Height	1,760 x 720 x 1,015 mm
Seat Height	761 mm
Wheelbase	1,200 mm
Kerb Weight	103 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Dual-piston caliper. Single 220mm disc / Single-piston caliper. Single 190mm disc
Tyres (Front/Rear)	120/70R12 51L / 130/70R12 56L
Suspension Front	31 mm Upside down Forks 100 mm travel
Suspension Rear	Mono shock 104 mm travel

Monkey

- Efficient new engine and 5-speed gearbox
- Sturdy chassis
- Funky style and new colours
- Full LED lighting
- Modern instruments
- IMU-controlled ABS braking



Set yourself free

Engine

Engine Type	Air-cooled SOHC 4-stroke 2-valve
Engine Displacement	124 cc
Max. Power Output	6.9 kW @ 6,750 rpm
Max. Torque	11 Nm @ 5,500 rpm
Fuel Consumption	1.5 L/100 km
CO ₂ Emissions	35 g/km

Chassis, Dimensions and Weight

Length x Width x Height	1,710 x 755 x 1,030 mm
Seat Height	775 mm
Wheelbase	1,145 mm
Kerb Weight	104 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	220 mm single hydraulic disc / 190 mm single hydraulic disc (IMU based ABS)
Tyres (Front/Rear)	120/80-12M/C / 130/80-12M/C
Suspension Front	USD Fork
Suspension Rear	Twin shock

Dax

- o Authentic to every last nut and bolt
- o Easy riding enjoyment for everyone
- o Smooth engine power and fuel efficiency
- o Wide tyres for a good all-round traction
- o Hydraulic disc brakes with ABS control
- o Full LED lighting



Riding is fun

Engine

Engine Type	Air-cooled SOHC 4-stroke 2-valve
Engine Displacement	124 cc
Max. Power Output	6.9 kW @ 7000 rpm
Max. Torque	10.8 Nm @ 5,000 rpm
Fuel Consumption	66.7 km/L
CO ₂ Emissions	35 g/km

Chassis, Dimensions and Weight

Length x Width x Height	1,760 x 760 x 1,020 mm
Seat Height	775 mm
Wheelbase	1,200 mm
Kerb Weight	107 kg

Wheels, Suspension and Brakes

Brakes (Front/Rear)	Single 220 mm hydraulic disc with IMU-based ABS / Single 190 mm hydraulic disc
Tyres (Front/Rear)	120/70-12M/C / 130/70-12M/C
Suspension Front	Telescopic 31mm USD fork, 100mm axle travel
Suspension Rear	Twin shock, 120mm axle travel

	CB1000 HORNET SP	CB1000 HORNET	CB750 HORNET	CB500 HORNET	CB650R
Engine					
Engine Type	Liquid-cooled DOHC 4-stroke 16-valve 4-cylinder	Liquid-cooled DOHC 4-stroke 16-valve 4-cylinder	Liquid-cooled SOHC 4-stroke 8-valve Parallel Twin with 270° crank	Liquid-cooled 4-stroke DOHC parallel twin	Liquid-cooled 4-stroke 16-valve DOHC inline-4
Engine Displacement	1,000 cc	1,000 cc	755 cc	471 cc	649 cc
Max. Power Output	115.6 kW @ 11,000 rpm	111.6 kW @ 11,000 rpm	67.5 kW @ 9,500 rpm (A2 Version: 34.5 kW @ 5,250 rpm)	35 kW @ 8,600 rpm	70 kW @ 12,000 rpm / 35 kW @ 10,500 rpm (A2)
Max. Torque	107 Nm @ 9,000 rpm	104 Nm @ 9,000 rpm	75 Nm @ 7,250 rpm (A2 Version: 66 Nm @ 4,750 rpm)	43 Nm @ 6,500 rpm	63 Nm @ 9,500 rpm / 49 Nm @ 4,500 rpm (A2)
Fuel Consumption/Emissions	5.9 L/100km / 136 g/km	5.9 L/100km / 136 g/km	4.3 L/100 km / 99 g/km (A2 Vs: 4.1 L/100km 95 g/km)	3.5L/100km / 80 g/km	4.9 L/100km / 113g/km
Chassis, Dimensions and Weight					
Length x Width x Height (mm)	2,140 x 790 x 1,085	2,140 x 790 x 1,085	2,090 x 780 x 1,085	2,080 x 800 x 1,060	2,120 x 780 x 1,075
Seat Height (mm)	809	809	795	785	810
Wheelbase (mm)	1,455	1,455	1,420	1,410	1,450
Kerb Weight (kg)	212	211	192	188	205 kg (MT) / 207 kg (E-Clutch)
Wheels, Suspension and Brakes					
Brakes (Front/Rear)	Radial mounted four-piston Brembo Stylema brake caliper, 310 mm floating double disc / Nissin Single piston caliper, 240 mm single disc	Radial mounted four-piston Nissin brake caliper, 310 mm floating double disc / Nissin Single piston caliper, 240 mm single disc	Radial mounted four-piston Nissin brake caliper, 296 mm floating double disc / Single piston caliper, 240 mm single disc	Dual 296mm x 4mm disc with Nissin axial mounted 4-piston calipers / Single 240mm x 5mm disc with single piston caliper	310 mm double disc with four piston caliper / 240 mm single disc with single piston caliper (2 channel ABS System Type)
Tyres (Front/Rear)	120/70ZR17M/C (58W) / 180/55ZR17M/C (73W)	120/70ZR17M/C (58W) / 180/55ZR17M/C (73W)	120/70ZR17M/C (58W) / 160/60ZR17M/C (69W)	120/70ZR17M/C / 160/60ZR17M/C	120/70 ZR17 / 180/55 ZR17
Suspension Front	41 mm Showa USD SFF-BP Fork 118 mm travel	41 mm Showa USD SFF-BP Fork 118 mm travel	Showa 41 mm SFF-BP USD, 130 mm travel	Showa© 41mm SFF-BP USD forks	41 mm SFF-BP USD forks
Suspension Rear	Ohlins Monoshock damper, Prolink swingarm, 139 mm travel	Showa Monoshock damper, Prolink swingarm, 138 mm travel	Monoshock damper, Prolink swingarm, 150 mm travel	Prolink mono with 5 stage preload adjuster, steel hollow cross swingarm	Monoshock damper with 10 stage adjustable preload



Mat Ballistic Black Metallic
New



Mat Iridium Gray Metallic
New



Pearl Glare White
New



Mat Ballistic Black Metallic
New



Mat Pearl Glare White
New



Mat Gunpowder Black Metallic



Pearl Himalayas White



Candy Chromosphere Red



Mat Gunpowder Black Metallic



Grand Prix Red
New



Digital Silver Metallic
New



Glint Wave Blue Metallic
New



Grand Prix Red



Pearl Smoky Gray



Mat Laurel Green Metallic

**HONDA MOTORCYCLES
EUROPE APP**



	CMX1100T	CMX1100SE	CMX1100	CMX500 REBEL	CL500	GB350S
Engine						
Engine Type	Liquid cooled 4-stroke 8-valve parallel twin with 270° crank and uni cam	Liquid cooled 4-stroke 8-valve parallel twin with 270° crank and uni cam	Liquid cooled 4-stroke 8-valve parallel twin with 270° crank and uni cam	Liquid-cooled DOHC 4-stroke 4-valve two-cylinder	Liquid-cooled DOHC 4-stroke 4-valve two-cylinder	Air-cooled, 4-stroke, 2 valve OHC single cylinder
Engine Displacement	1,084 cc	1,084 cc	1,084 cc	471 cc	471 cc	348 cc
Max. Power Output	65 kW at 7,250 rpm	65 kW at 7,250 rpm	65 kW at 7,250 rpm	34 kW @ 8,500 rpm	34 kW @ 8,500 rpm	15.5 kW @ 5,500 rpm
Max. Torque	98 Nm @ 4,750 rpm	98 Nm @ 4,750 rpm	98 Nm @ 4,750 rpm	43.3 Nm @ 6,000 rpm	43.4 Nm @ 6,000 rpm	29 Nm @ 3,000 rpm
Fuel Consumption/Emissions	4.9 L/100 km (MT) / 5.3 L/100 km (DCT) / 114 g/km (MT) / 123 g/km (DCT)	5.3 L/100km / 123 g/km	4.9 L/100 km (MT) / 5.3 L/100 km (DCT) / 114 g/km (MT) / 123 g/km (DCT)	3.6 L/100km / 84 g/km	3.7 L / 100 km / 86 g/km	2.5 L/100km / 57 g/km
Chassis, Dimensions and Weight						
Length x Width x Height (mm)	2,240 x 850 x 1,180mm (MT) 2,240 x 845 x 1,180mm (DCT)	2,240 x 880 x 1,125 mm	2,240 x 850 x 1,125 mm (MT) 2,240 x 835 x 1,125 mm (DCT)	2,205 x 810 x 1,090	2,175 x 830 x 1,135	2,175 x 790 x 1,100
Seat Height (mm)	710	710	710	690	790	800
Wheelbase (mm)	1,520	1,520	1,520	1,490	1,484	1,440
Kerb Weight (kg)	240 (MT) / 250 (DCT)	237	226 (MT) / 236 (DCT)	191	191	178
Wheels, Suspension and Brakes						
Brakes (Front/Rear)	Radial mounted monoblock four-piston brake caliper, 330mm floating single disc / two single piston caliper, 256mm single disc	Radial mounted monoblock four-piston brake caliper, 330mm floating single disc / Two single piston caliper, 256mm single disc	Radial mounted monoblock four-piston brake caliper, 330mm floating single disc / Two single piston caliper, 256mm single disc	Single 296 mm disc with Nissin axial-mount two piston calipers / Single 240 mm disc with single piston caliper	Single 310 mm floating disc, 2 piston calipers / Single 240 mm disc, 1 piston caliper (2 channel ABS Type)	Two piston brake caliper, 310 mm single disc / Single piston caliper, 240 mm single disc
Tyres (Front/Rear)	130/70B18 M/C 63H / 180/65B16 M/C 81H	130/70B18 M/C 63H / 180/65B16 M/C 81H	130/70B18 M/C 63H / 180/65B16 M/C 81H	130/90-16M/C (67H) / 150/80-16M/C (71H)	110/80 R19M / 150/70 R17	100/90R19 M/C (57H) / 150/70R17 M/C (69H)
Suspension Front	Preload adjustable 43mm cartridge style	Preload adjustable 43mm cartridge style	Preload adjustable 43mm cartridge style	41 mm Telescopic forks 121 mm travel	Telescopic 41 mm Upright forks	Telescopic fork, 106 mm travel
Suspension Rear	Preload adjustable twin piggyback rear shock	Preload adjustable twin piggyback rear shock	Preload adjustable twin piggyback rear shock	Showa twin shock with system 95 mm travel	Twin shock with 45 mm round pipe swingarm, 5-step preload adjustment	Twin shocks, 120 mm travel



Iridium Grey Metallic
New



Matte Ballistic Black Metallic
New · Special Edition



Pearl Hawkseye Blue
New



Mat Gunpowder Black Metallic
New



Mat Dim Gray Metallic
New



Mat Gunpowder Black Metallic



Mat Laurel Green Metallic



Gunmetal Black Metallic
New



Pearl Deep Mud Gray
New



Flare Orange Metallic
New · Special Edition



Candy Energy Orange
New · Special Edition



Mat Fresco Brown
New



Pearl Dusk Yellow
New



Puco Blue
New

**HONDA MOTORCYCLES
EUROPE APP**




	CB125R	CB125F	MSX125 GROM	MONKEY	DAX 125
Engine					
Engine Type	Liquid-cooled 4-stroke 4-valve DOHC single cylinder	Air-cooled 4-stroke 2-valves OHC single cylinder	Air-cooled 2-valve single cylinder	Air-cooled SOHC 4-stroke 2-valve	Air-cooled SOHC 4-stroke 2-valve
Engine Displacement	124.9 cc	124 cc	124 cc	124 cc	124 cc
Max. Power Output	11 kW @ 10,000 rpm	8 kW @ 7,500 rpm	7.3kW @ 7,250 rpm	6.9 kW @ 6,750 rpm	6.9 kW @ 7000 rpm
Max. Torque	11.6 Nm @ 8,000 rpm	10.9 Nm @ 6,000 rpm	10.8 Nm @ 6,000 rpm	11 Nm @ 5,500 rpm	10.8 Nm @ 5,000 rpm
Fuel Consumption / Emissions	2.1 L/100 km / 50 g/km	1.4 L/100 km / 34 g/km	1.5 L/100km / 35.1 g/km	1.5 L/100 km / 35 g/km	66.7 km/L / 35 g/km
Chassis, Dimensions and Weight					
Length x Width x Height (mm)	2,015 x 820 x 1,055	2,015 x 750 x 1,100	1,760 x 720 x 1,015	1,710 x 755 x 1,030	1,760 x 760 x 1,020
Seat Height (mm)	816	790	761	775	775
Wheelbase (mm)	1,345	1,280	1,200	1,145	1,200
Kerb Weight (kg)	130	117	103	104	107
Wheels, Suspension and Brakes					
Brakes (Front/Rear)	296 mm single disc with hydraulic dual piston brake caliper / 220 mm single disc with hydraulic single piston brake caliper (Front and rear independent ABS with IMU)	240 mm single disc with 2 piston caliper / 130 mm drum (2 channel CBS)	Dual-piston caliper. Single 220mm disc / Single-piston caliper. Single 190mm disc	220 mm single hydraulic disc / 190 mm single hydraulic disc (IMU based ABS)	Single 220 mm hydraulic disc with IMU-based ABS / Single 190 mm hydraulic disc
Tyres (Front/Rear)	110/70 R17 / 150/60 R17	80/100 R18 / 90/90 R18	120/70R12 51L / 130/70R12 56L	120/80-12M/C / 130/80-12M/C	120/70-12M/C / 130/70-12M/C
Suspension Front	41 mm SFF-BP USD forks	31 mm Telescopic	31 mm Upside down Forks 100 mm travel	USD Fork	Telescopic 31mm USD fork, 100mm axle travel
Suspension Rear	Single damper		Mono shock 104 mm travel	Twin shock	Twin shock, 120mm axle travel



**HONDA MOTORCYCLES
EUROPE APP**



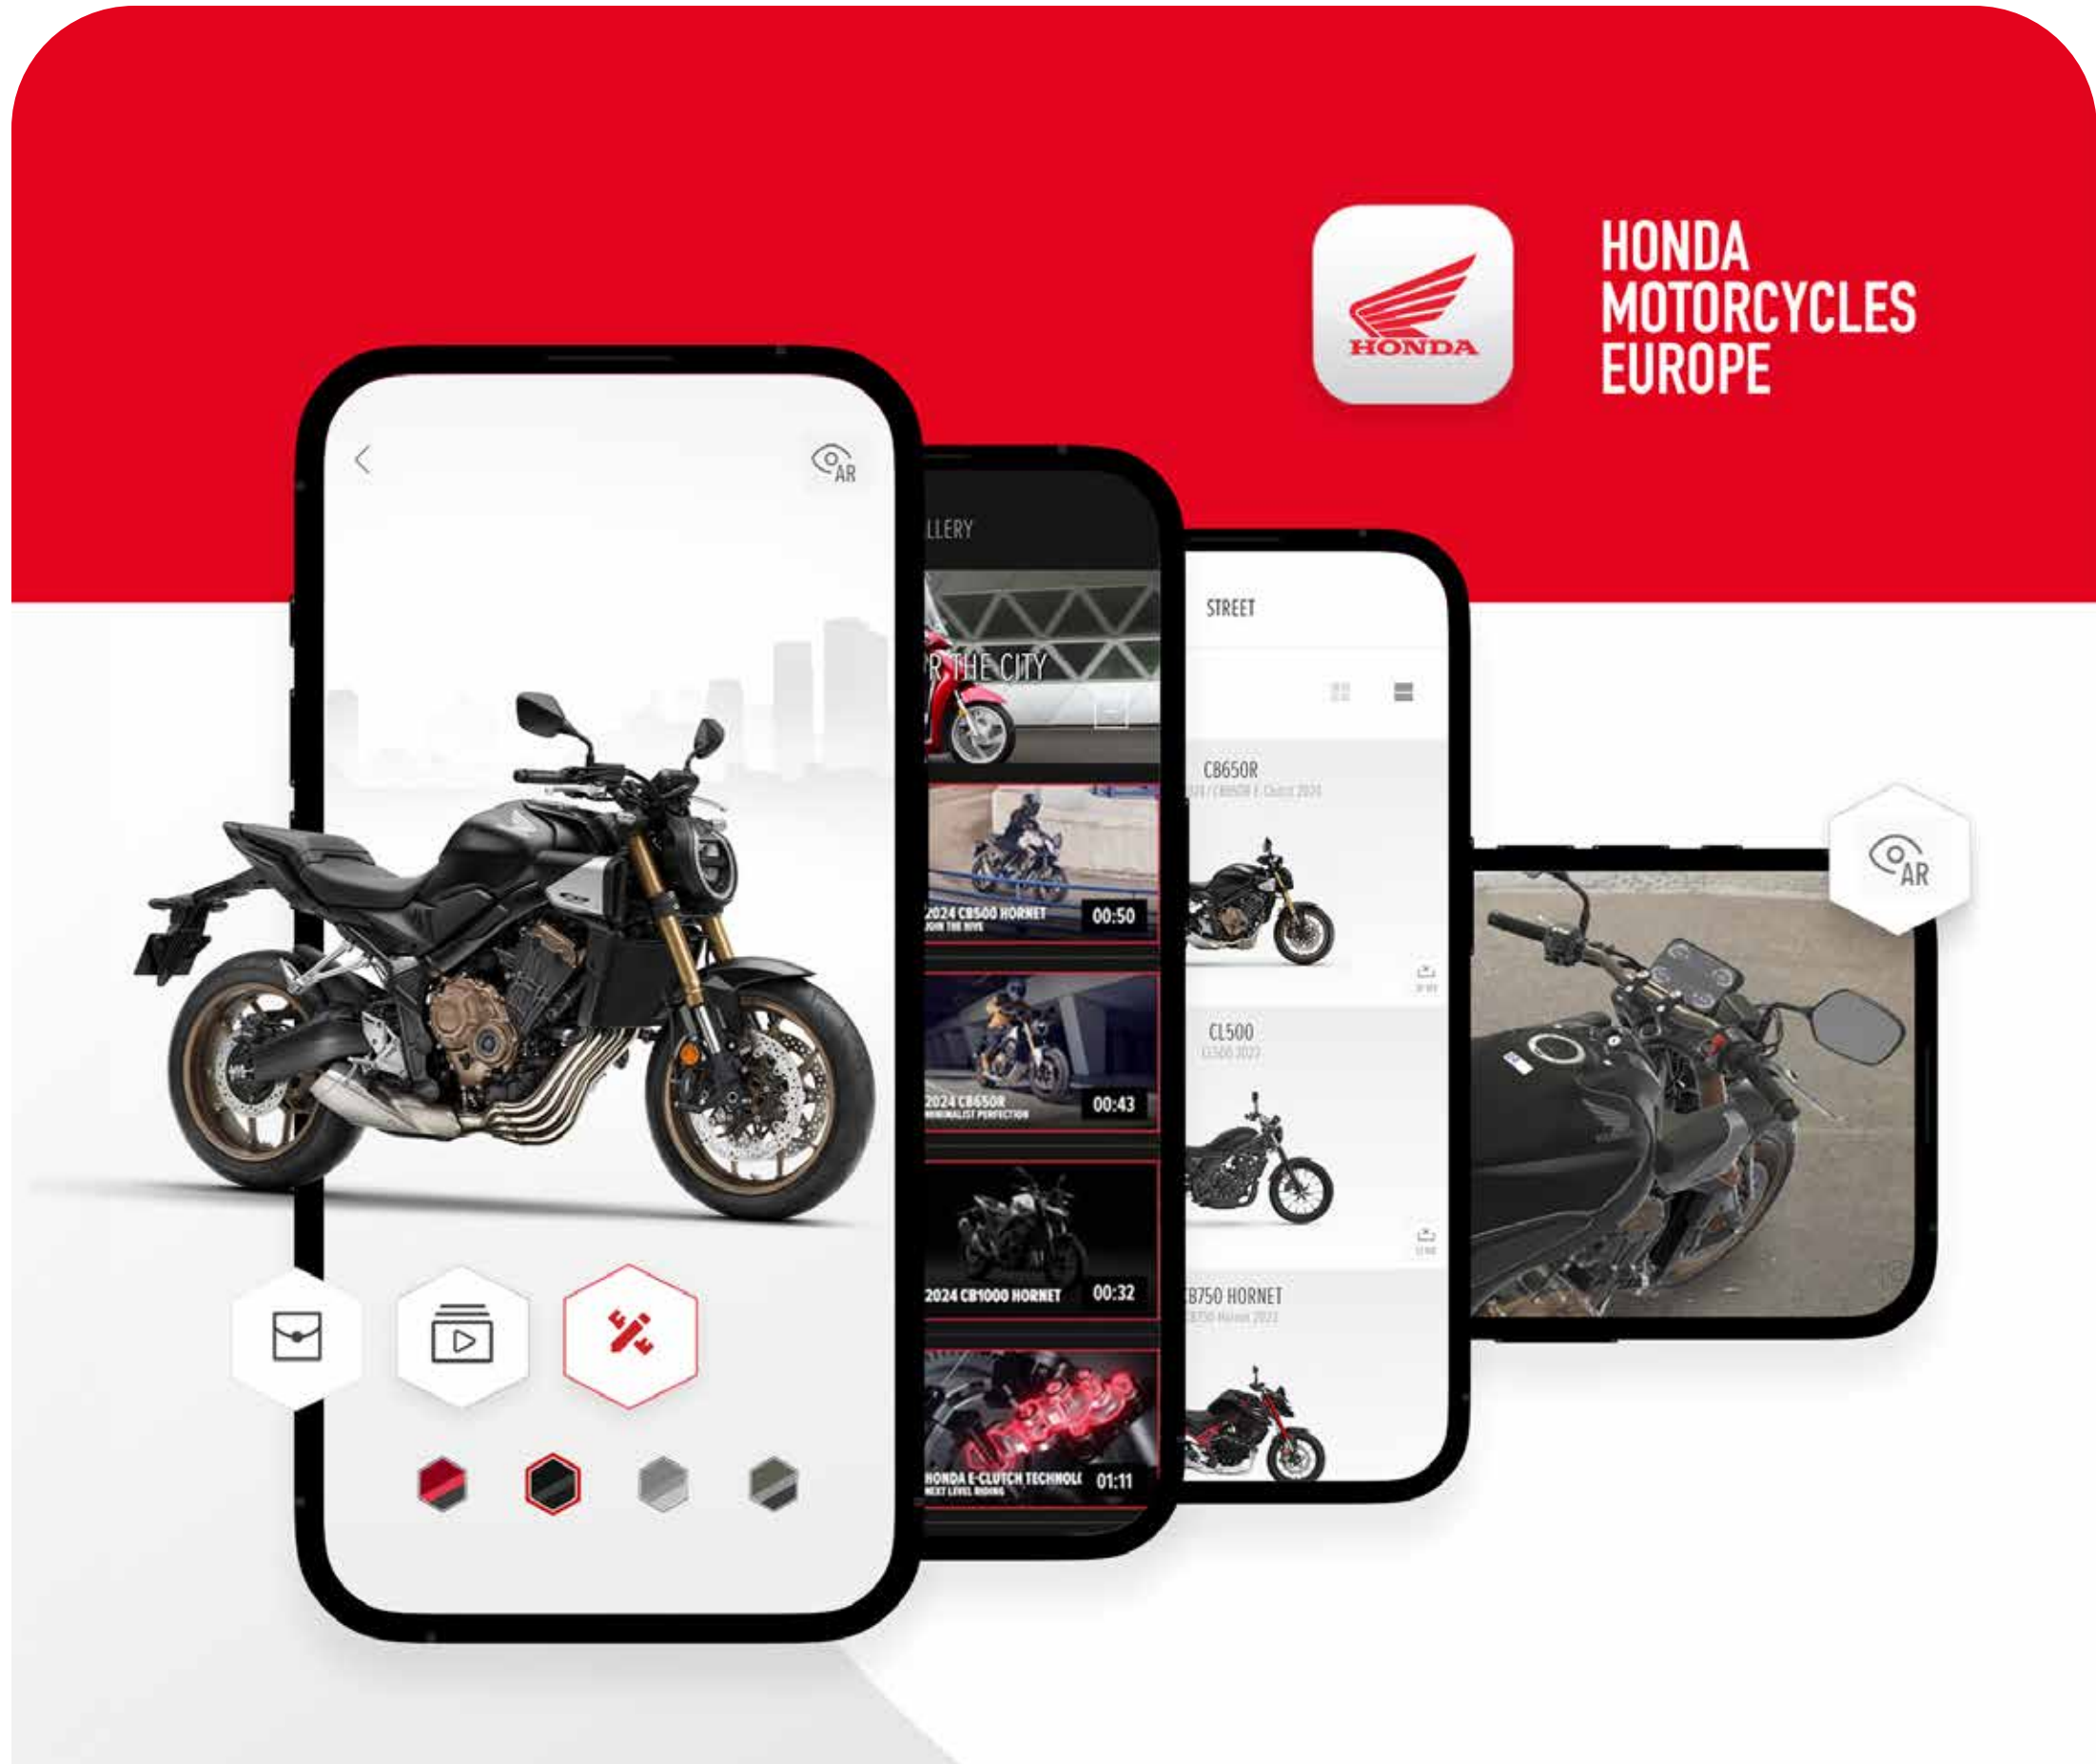

HONDA
MOTORCYCLES
EUROPE

HONDA MOTORCYCLES EUROPE APP

- EXPLORE THE LATEST MOTORCYCLES
- VIDEO GALLERY
- CONFIGURE YOURS
- ALL COLOURS AND ACCESSORIES
- SEE IT IN 3D AND AR

Configure your bike and find out more about the full range and accessories by visiting our website or downloading the Honda Motorcycles Europe app.



The Power of Dreams





The specific details of this brochure do not apply to any particular product supplied or offered for sale. Manufacturers reserve the right to vary specifications, including colours, with or without notice at such times in such manner as deemed appropriate. Major as well as minor changes may be involved. Every effort, however, is made to ensure the accuracy of the particulars contained in this brochure. Consult your Dealer for details regarding the specifications of any featured product. This publication shall not constitute – under any circumstances whatsoever – an offer by the Company to any individual. All sales are made by the Distributor or Dealer subject to and with the benefit of the standard Conditions of Sale and Warranty provided by the Distributor or Dealer, copies of which may be obtained upon request. While efforts are made to ensure specification accuracy, brochures are prepared and printed several months in advance of distribution and consequently cannot always immediately reflect either changes in specification or in some isolated cases the provision of a particular feature. Customers are always advised to discuss specific details with the supplying Dealer, especially if a selection is dependent upon one of the features advertised. Please contact your local dealer for information and specifications. Please note that the fuel consumption figures provided are results obtained by Honda under standardised testing conditions prescribed by WMTC. Tests are conducted on a rolling road using a standard version of the vehicle with only one rider and no additional optional equipment. Actual fuel consumption may vary depending on how you ride, how you maintain your vehicle, weather, road conditions, tyre pressure, installation of accessories, cargo, rider and passenger weight, and other factors. You accept that if you do go ahead and make a purchase or enter into any kind of transaction, whether for payment or not, you did so entirely in reliance on your own skill and judgement and not on that of anyone else.

Read the owner's manual thoroughly. Get to know your machine and its capabilities. Concentration assists anticipation. Observe other road users' movements. Brake in plenty of time. Always wear a helmet and quality kit, ride fit and NEVER after drinking alcohol. Good roadcraft and courtesy identify the skilled and stylish rider. Honda endorse the law that all helmet visors must comply with BS 4110. Visors that transmit less than 50% of visible light cannot legally be used on the road.

Honda Motor Europe – Motorcycles
Cain Road, Bracknell, Berkshire, RG12 1HL England
insert local URL here



Please don't bin me.
Pass me on to a
friend or recycle me.

Honda Motor Europe sources
paper responsibly from
manufacturers within the EU.



BLUE SKIES FOR
OUR CHILDREN